

DESCRIPTION:

Laminat carrier for cable identification with strip to laminate text label.
The carrier is to be fixed with 2 cable ties directly on the cables and wires.

DIMENSIONS

| CATALOG NUMBER | PART NUMBER | TEXT AREA DIMENSION | OVERALL DIMENSIONS | LABEL RECOMMENDED |
|--------------------|-------------|---------------------|--------------------|-------------------|
| HSLT-2600-0.500-YL | 350025 | 1.772 x 0.354 | 2.559 x 0.512 | 1.575 x 0.236 |
| HSLT-2800-0.375-YL | 350124 | 1.772 x 0.354 | 2.795 x 0.354 | 1.575 x 0.236 |
| HSLT-2000-0.375-GR | 327003 | 1.929 x 0.394 | 2.756 x 0.394 | 1.575 x 0.23 |
| HSLT-4000-0.600-YL | 350186 | 2.165 x 0.591 | 4.055 x 0.591 | 1.969 x 0.394 |
| HSLT-5000-0.600-YL | 350216 | 3.150 x 0.591 | 5.039 x 0.591 | 2.953 x 0.394 |
| HSLT-7000-0.600-YL | 350278 | 5.118 x 0.591 | 7.008 x 0.591 | 3.937 x 0.394 |

PHYSICAL DATA Top-Film:

- Polyester (0-PET)
- Thickness: 50µ
- Halogen free
- Color: Transparent

Adhesive:

- Long life adhesive especially selected for lamination application.
- UV resistant pressure sensitive acrylic adhesive.
- High adhesion on low energy surfaces.
- Acrylic based adhesive

Liner:

- One side siliconized, totally chlorine-free (TCF), wood-free kraft paper.
- Weight: 120 g/m².
- Color: White

PHYSICAL DATA Carrier-Film:

- UV stabilized Polypropylene (PP)
- Thickness: 500 µ
- Color: Yellow
- Halogen free

Mounting Instructions:

- 1) Place the Laminat carrier on a flat surface, and bend the protective foil backwards.
- 2) Place the label in the centre, leaving space for sealing on all four sides of the label.
- 3) Seal the carrier by placing a finger on the foil and pushing forward, thus rolling over the foil and rolling off the silicon liner.
- 4) Always feed the cable ties from the top, thus bending down the Laminat carrier along the cable.

**Standard colors:**

Yellow

Operating temperature:

14F to 140F (-10°C to +60°C).

Application temperature:

50F (>+10°C).


Service Lifetime:

DTI has tested the product according to DS 1094.4:

Expected service life time for the product is minimum 10 to 15 years without delamination.

General remark:

Long-term heat- and/or UV exposure may result in discoloration of the product.

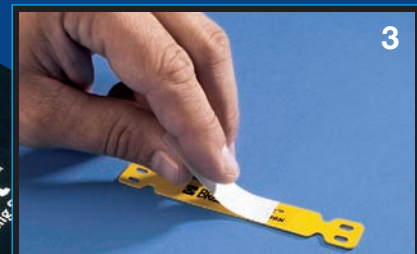

A highly versatile and dependable marking system, which enables you to permanently mark cables and wires.



| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-2000-0.375-GR | 327003 | Laminat Carrier for use with one cable tie, milky | 1.772 x 0.354 | 1.969 x 0.354 | 100 | 1.575 x 0.236 / 0.236 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984')




| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-2600-0.500-YL | 350025 | Laminat Carrier for use with cable ties, yellow | 1.772 x 0.354 | 2.559 x 0.512 | 100 | 1.575 x 0.236 / 0.236 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984').




| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-2800-0.375-YL | 350124 | Laminat Carrier for use with cable ties, yellow | 1.772 x 0.354 | 2.795 x 0.354 | 100 | 1.575 x 0.236 / 0.236 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984').




| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-4000-0.600-YL | 350186 | Laminat Carrier for use with cable ties, yellow | 2.165 x 0.591 | 4.055 x 0.591 | 100 | 1.969 x 0.392 / 0.354 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984').



| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-5000-0.600-YL | 350216 | Laminat Carrier for use with cable ties, yellow | 3.150 x 0.591 | 5.040 x 0.591 | 100 | 2.953 x 0.394 / 0.354 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984').



| CATALOG NUMBER | PART NUMBER | DESCRIPTION | SEAL-UP AREA | TOTAL LENGTH X HEIGHT | CARRIERS PER BOX | LABES/TAPE RECOMMENDED |
|--------------------|-------------|---|---------------|-----------------------|------------------|----------------------------|
| HSLT-7000-0.600-YL | 350278 | Laminat Carrier for use with cable ties, yellow | 5.118 x 0.591 | 7.008 x 0.591 | 50 | 3.937 x 0.394 / 0.354 tape |

Recommended Ribbon Part Number 356126 (4.331" x 984').