

Laminat™ Manila Tags

Self-sealing Manila Tags for identification of material in tough environments, including valves, instruments, motors and other industrial components.

The tags are available in two versions; with and without stainless steel reinforcement rings, and for mounting use cable ties or metal thread.

Mounting Instructions:

- 1) Place the tag on a flat surface, and bend the protective foil backwards.
- 2) Place the label in the center, leaving space for sealing on all four sides of the label.
- 3) Seal the tag by placing a finger on the foil and pushing forward, thus rolling over the foil and rolling off the silicon liner.



CATALOG NUMBER	PART NUMBER	DESCRIPTION	SEAL-UP AREA	TOTAL L X H	TAGS PER BOX	LABES/TAPE RECOMMENDED
HSLT-2300-1-YL	350407	Laminat Instrument tag, Manila, yellow	1.693 x 0.984	2.323 x 0.984	50	1.575 x 0.787 / 0.354, 0.472, 0.748 tape
HSLT-2300-1-YL-R	350414	Laminat Instrument tag, Manila, Reinforced, yellow	1.693 x 0.984 w/rivet	2.323 x 0.984	50	1.575 x 0.787 / 0.354, 0.472, 0.748 tape
HSLT-5900-1-YL	350445	Laminat Instrument tag, Manila, yellow	5.315 x 0.984	5.906 x 0.984	50	3.937 x 0.394 / 0.354, 0.472, 0.748 tape
HSLT-5900-1-YL-R	350452	Laminat Instrument tag, Manila, Reinforced, yellow	5.315 x 0.984 w/rivet	5.906 x 0.984	50	3.937 x 0.394 / 0.354, 0.472, 0.748 tape


Laminat™ Selfadhesive Pockets

Self-sealing, self-adhesive pockets for identification of material in tough environments, including cabinets, motors, shelves and much more.

The pockets are constructed with a clear over-lamination foil, which seals and protects label and text.

Mounting Instructions:

- 1) Place the pocket on a flat surface, and bend the protective foil backwards.
- 2) Place the label in the center, leaving space for sealing on all four sides of the label.
- 3) Seal the pocket by placing a finger on the foil and pushing forward, thus rolling over the foil and rolling off the silicon liner.
- 4) Remove the silicone backing liner and apply the pocket with a light pressure on the surface.

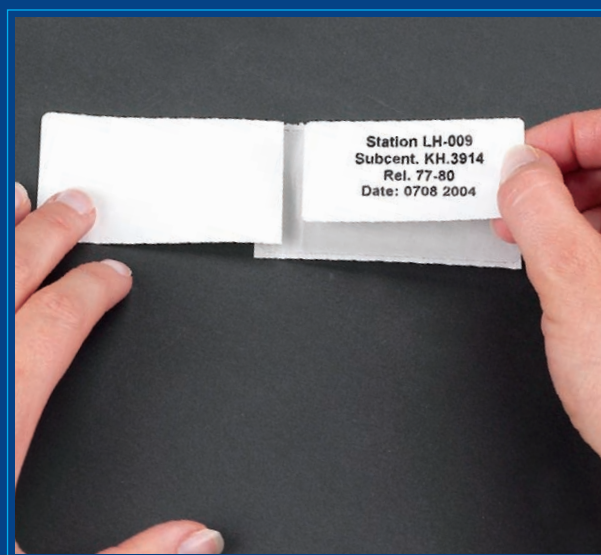

CATALOG NUMBER	PART NUMBER	DESCRIPTION	SIZE	POCKETS PER BOX	LABES/TAPE RECOMMENDED
HSLT-2375-0.600-CL	322879	Laminat Pocket, selfadhesive	2.362 x 0.591	80	1.967 x 0.394 / 0.354 and 0.5 tape
HSLT-2600-160-CL	322886	Laminat Pocket, selfadhesive	2.598 x 1.575	40	2.362 x 1.181 / 1.5 tape
HSLT-2750-260-CL	322848	Laminat Pocket, selfadhesive	2.740 x 2.598	50	3.543 x 2.362

Laminat™ Selfadhesive Pockets

PHYSICAL DATA TOP-FILM:

- Polyester (O-PET)
- Thickness: 23µ
- Color: Transparent

ADHESIVE

- Long life adhesive clear permanent acrylic adhesive
- Stainless and no soaking
- Especially selected for lamination application

LINER

- Single sided siliconized glassine paper
- Weight: 67 g/m²
- Color: White

PHYSICAL DATA CARRIER:

- 100% acid-free, cadmium free vinyl
- Thickness: 300µ
- Color: Transparent

ADHESIVE

- Long life rubber-based thermoplastic adhesive
- Stainless and no soaking
- No resistance plasticizers

LINER

- Single sided siliconized wood-free glassine paper
- Weight: 62 g/m²
- Color: White

Technical Data

Standard colors: Transparent

Material: Polyester

Operating temperature:
14F to 140F (-10°C to +60°C).

Application temperature:
Min. 50F (Min. +10°C).

Recommended Ribbon Part Number
356126 (4.331" x 984').